


DHG546

VoIP Cable Modem
with Battery Backup

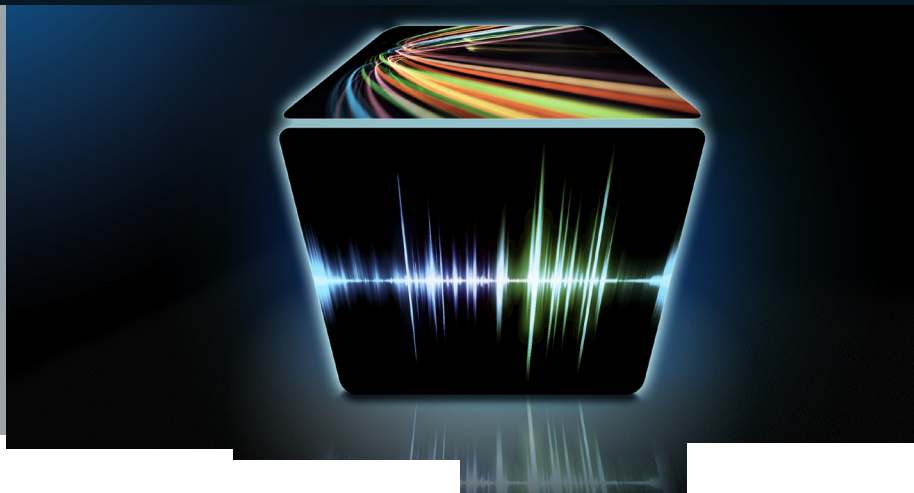

On January 27th 2010, Thomson changed its company name to Technicolor. All product data sheets, including those for products which still carry the Thomson name, now reflect our new Technicolor brand.

Following the technology evolution, Technicolor is pleased to introduce the DHG546 EMTA modem, the successor of the highly successful DHG536. This Voice Cable Modem is an indoor EMTA (Embedded Multimedia Terminal Adapter) solution based on DOCSIS™ 2.0 and PacketCable standards.

Technicolor is the first supplier to win certification for PacketCable 2.0, an emerging suite of CableLabs specifications that supports IP Multimedia Subsystem (IMS) and Session Initiation Protocol (SIP).

As an E-DVA (Embedded Digital Voice Adapter), the DHG546 embeds a DOCSIS cable modem, a residential SIP telephony (RST) client, and analog ports for telephony devices.

CABLE
DATA
VOICE

Easy to Use, Easy to Install

As all Technicolor gateways, the DHG546 with Ethernet connectivity is an easy to use, easy to install gateway.

For convenience of the end user, the easy-to-access LEDs provide a clear indication of start-up sequence and connectivity status.

Multiple integrated Web pages allow direct access to the status and settings, including privacy and security information.

Advanced Voice Performance

All standard codecs are supported, including the new iLBC and BV16. 300 MHz Dual Instruction MIPS32 CPU and DSP Instruction Extensions for VoIP in order to guarantee superior performance.

Gateway and Voice operations support data throughput and complex voice codec calls simultaneously.

Advanced Diagnostics

- Web pages to facilitate installation and troubleshooting
- Easy configuration and set-up
- Remote access via Telnet, SNMP, Web Page
- Post-installation easily managed with SNMP

Features at a Glance

- DOCSIS 2.0 certified
- PacketCable 1.5, 2.0 certified
- Propane™ technology, enabling the connection of more Internet users without additional network bandwidth
- Ethernet port for wired connectivity and easy installation
- Reliable high-performance platform
- IPv6 ready
- Internal Power Supply and Battery Backup

CableLabs®

DHG546

VoIP Cable Modem
with Battery Backup

Technical Specifications

Standards / Certifications

■ Data	DOCSIS 2.0 certified
■ Voice	PacketCable 2.0 certified
■ CMTS Interoperability	Any qualified DOCSIS CMTS

Receiver

■ Downstream Modulation	QAM 64/256
■ Downstream Frequency Range	88-860 MHz, 1GHz tuning capabilities
■ Maximum Downstream Data Range	30.34/42.88 Mbps (QAM 64/ QAM 256)
■ Input Signal Level Range	-15 to +15 dBmV (QAM 64) -15 to +15 dBmV (QAM 256)
■ BER	<1x10 ⁻⁸ @ C/N=23.5dB, QAM 64 with FEC, <1x10 ⁻⁸ @ C/N=30dB, QAM 256 with FEC, received power = -6dBmV to +15dBmV <1x10 ⁻⁸ @ C/N=33dB, QAM 256 with FEC, received power = -15dBmV to -6dBmV
■ Input Impedance	75 Ohm

Transmitter

■ Upstream Modulation	QPSK and 16 QAM
■ Additional Upstream Modulation Types	QAM 8/32/64 for A-TDMA and QAM 128 for S-CDMA channels
■ Upstream Frequency Range	5-42 MHz
■ Maximum Upstream Data Range	30.72 Mbps (QAM 64)
■ Output Signal Level Range	A-TDMA: +8 to +58 dBmV/QPSK +8 to +55 dBmV @ QAM 8/16 +8 to +54 dBmV @ QAM 32/64 S-CDMA: +8 to +53 dBmV/All
■ Output Impedance	75 Ohm
■ Channel Bandwidth	Programmable (200*N KHz) N=1, 2, 4, 8, 16, 32
■ Automatic Level Adjust	yes
■ Gain Control Range	50dB
■ Frequency Stability	± 5 kHz

Telephony Features

■ Audio Codecs	PCM A-law, PCM μ -law, G.729, G.729a, G.729e, G.728, iLBC and BV16
■ Multi-line Phone Support	Yes, Two phone lines, three-party conference calls, can support two complex voice codecs simultaneously
■ Fax Relay	T.38
■ DTMF Tone relay	RFC2833
■ Caller ID	Type I and Type II
■ CLASS features	BASIC and Extended CLASS features
VAD (Voice Activity Detection)	yes
CNG (Comfort Noise Generation)	yes
Echo cancellation	G.165/G.168 up to 16ms
Packet Tone	DTMF generation/Call Progress Generation/Custom Tone Generation
Call discrimination	Fax and Modem Detection
Telephony interface capabilities	Loop-back and on demand diagnostic
Modems	Up to V.90 (38.5kbps)
RFC2833 DTMF Tone relay	Enabled/disabled via SNMP and Telnet
REN	5 REN
Pulse dialing	DTMF tones to pulse tones conversion and pulse to DTMF tones conversion

VoIP Call Control

RTP layer	RFC1889/RFC1890
RTCP statistics collection	yes
PacketCable Protocols	Protocol (PKT-SP-EC-MGCP)

PC Compatible

■ CPU	486DX 66MHz (Pentium Preferred)
■ Memory	RAM 16MB (32MB Preferred)
■ Operating Systems	Windows 7, Vista, XP, Me and 2000
■ Available Disk Space	76 MB
■ Sound Card	16-Bit
■ Video	VGA (SVGA Preferred)
■ Ethernet Port	10/100 Base-T
■ Drive	CD-ROM

DHG546

VoIP Cable Modem
with Battery Backup



Technical Specifications

Software Features

■ Software Downloadable	yes
■ Multiple Client Support	254
■ Class of Services (CoS)	16 SIDs
■ Protocol Filtering	Ethernet & IP
■ SNMP Management	V2, V3
■ Security	BPI+
■ Privacy	Through encryption between gateway and PC
■ HTTP Server (CM status)	yes

Interfaces / Physical

■ Ethernet	1 x RJ45 - 10/100 Base-T auto detect
■ Telephone line	2x RJ11
■ RF Connector	1 x F-Type
■ Button	Reset
■ LEDs	Power, DS, US, Online, Link, Tel1, Tel2, Battery
■ Power Supply	Internal, 100-240 VAC, 0.8 A, 50-60 Hz
■ Battery Back-up	1 x compartment: up to 5-hrs talk, 8 hrs standby
■ Operating Temperature	32°F to 104°F
■ Operating Humidity	20% to 90% non-condensing
■ Storage Temperature	-4°F to 158°F
■ Safety	FCC Part 15, UL

Packaging Information

■ Cabinet Dimensions	in: 7 1/8" (W) x 5 1/8" (L) x 2 3/4" (H)
■ Packaging Dimensions	in: 10 1/4" (W) x 7 3/4" (L) x 4" (H)
■ Shipping Weight	Approx. 2.5 lbs
■ Master-pack Dimensions	in: 12 1/2" (W) x 20 1/2" (L) x 8 3/4" (H)
■ Master-pack Shipping Weight	Approx. 25 lbs
■ Master-pack Quantity	10 units

Content of the Box

- VoIP Cable Modem
- Power Battery
- Ethernet Cable
- CD-ROM
- Quick Installation Guide

Technicolor Professional Services are available to address your demands for qualified technical support & warranty, product maintenance, access to training courses and tailor-made solutions to specific product evolution. For more information, please ask your usual contact person.

TECHNICOLOR WORLDWIDE HEADQUARTERS
1, rue Jeanne d'Arc
92443 Issy-les-Moulineaux France
Tel. : 33(0)1 41 86 50 00 - Fax : 33 (0) 1 41 86 58 59

www.technicolor.com

SALES CONTACT

For more information please get in touch with your usual sales representative or use the following email:

cablesales@technicolor.com



© Copyright 2010 Technicolor. All rights reserved.
Photos and specifications subject to change without notice. All trade names referenced are service marks, trademarks, or registered trademarks of their respective companies. DS-009-v02-1004