

# Basic Setup for TG585 v7

Go to 192.168.1.254, the screen below will appear

THOMSON

THOMSON TG585 v7



Thomson Gateway


Broadband Connection

Toolbox


Home Network

Click on Thomson Gateway

[ [Administrator](#) ] [Help](#)  
[Home](#)


 **Your DSL connection is down. Verify that your Thomson Gateway is correctly connected to your phone line. If the problem persists, check your documentation.**

---

 **Thomson Gateway**


- [Information](#)  
Product Name: TG585 v7  
Software Release: 7.4.2.7

---

 **Broadband Connection**


- [Internet:](#) Disconnected

---

 **Toolbox**

- [Remote Assistance:](#) Disabled
- [Game & Application Sharing](#)
- [Firewall:](#) Disabled
- [Parental Control](#)

---

 **Home Network**

- [Wireless:](#) No devices detected
- [Ethernet:](#) [Unknown-00-19-d1-40-bf-77](#)

# Basic Setup for TG585 v7

THOMSON TG585 v7



THOMSON

## Thomson Gateway

- Information
- Configuration
- Event Logs

Broadband Connection

Toolbox

Home Network

[ [Administrator](#) ]

[Help](#)

[Home](#) > [Thomson Gateway](#)



**Your DSL connection is down. Verify that your Thomson Gateway is correctly connected to your phone line. If the problem persists, check your documentation.**



## Thomson Gateway






### Information

Product Name:	TG585 v7
Serial Number:	CP0805TF0LQ
Software Release:	7.4.2.7

### Configuration


Service Name:	Routed PPPoE on 8/35
Time Since Power-on:	0 days, 0:58:59

### Pick a task...

-  [Set Up](#)
-  [Restart](#)
-  [Return to Factory Default Settings](#)
-  [View event logs](#)
-  [Check connectivity to the Internet](#)

Click on Set Up

# Basic Setup for TG585 v7

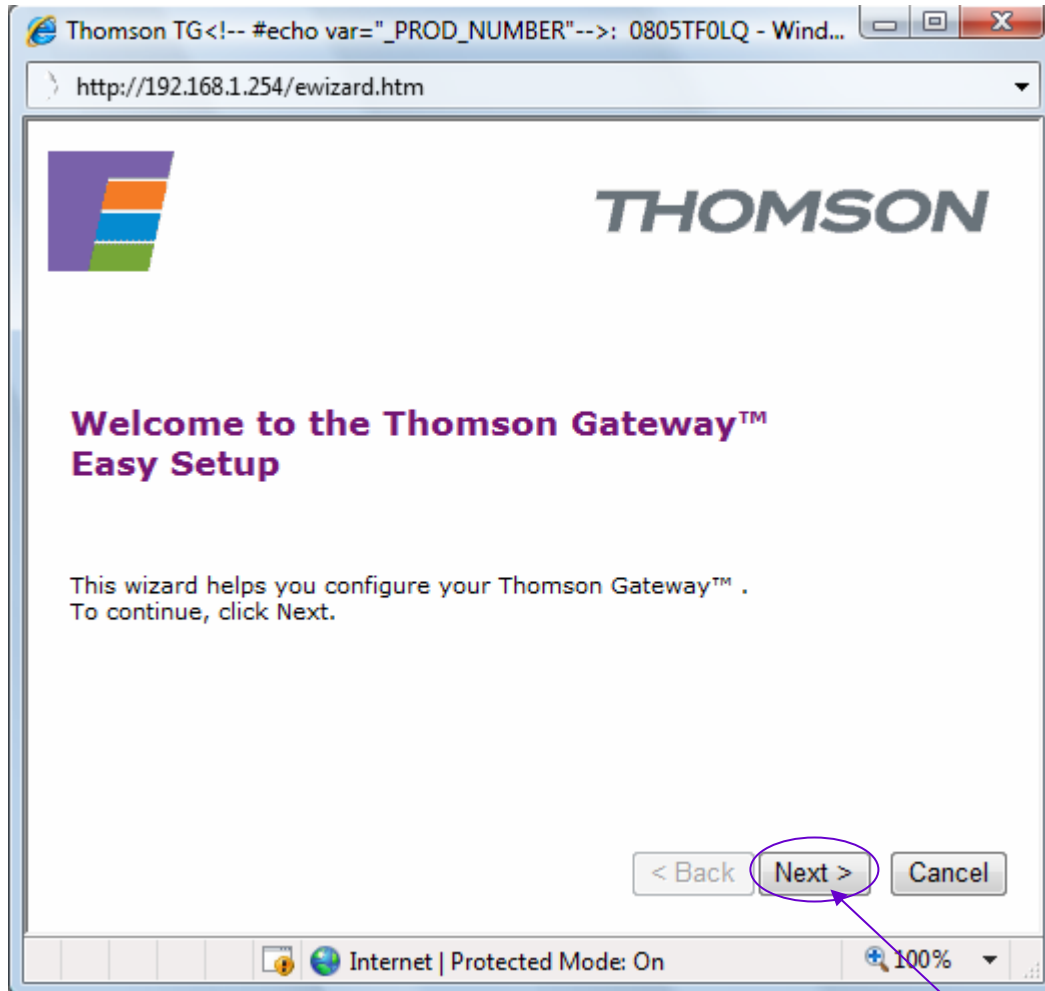

Click on Next

# Basic Setup for TG585 v7

Thomson TG<!-- #echo var="\_PROD\_NUMBER"-->: 0805TF0LQ - Wind...

http://192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

## Service Selection

You need to select the service you want to connect to.

Select the service of your DSL account. Click Next to continue.

Select a service:

- Routed PPP
- Bridge

Description of selected service:

DESCRIPTION	Routed Connection.
REGION	World
PROVIDER	Basic

< Back   Next >   Cancel

Internet | Protected Mode: On   100%

Select "Routed PPP" service

Click on Next

# Basic Setup for TG585 v7

Thomson TG<!-- #echo var="\_PROD\_NUMBER"-->: 0805TF0LQ - Wind...

http://192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

### Routed Internet Connection

Specify the details of the Internet connection. All information should be provided by your ISP.

VPI/VCI: 0.35  
Choose a VPI/VCI from the list

Connection Type:  
 PPP over ATM (PPPoA)  
 PPP over Ethernet (PPPoE)

< Back   Next >   Cancel

Internet | Protected Mode: On   100%

Select 0.35 for VPI/VCI

Select PPPOE for  
Connection Type

Click on Next

# Basic Setup for TG585 v7

Thomson TG<!-- #echo var="\_PROD\_NUMBER"-->: 0805TF0LQ - Mozil...

http://192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

### Internet Account Settings

Specify the details of your Internet Account. All information should be provided by your ISP.

User Name   
Enter your Internet connection user name.

Password   
Enter your Internet connection password.

Confirm Password   
Re-enter your password.

< Back **Next >** Cancel

Done

Type The User Name & Password in the fields (e.g. must be 6 digits)

Click on Next

# Basic Setup for TG585 v7

Thomson TG<!-- #echo var="\_PROD\_NUMBER"-->: 0805TF0LQ - Wind...

http://192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

### Access Control

Specify user name and password to prevent unwanted access to the SpeedTouch management interface.

User Name   
Enter a user name.

Password   
Enter a password.

Confirm Password   
Re-enter the password.

< Back **Next >** Cancel

Internet | Protected Mode: On 100%

Leave those fields as written

Click on Next

# Basic Setup for TG585 v7

Thomson TG<!-- #echo var="\_PROD\_NUMBER"-->: 0805TF0LQ - Wind...

http://192.168.1.254/cgi/wizard/?be=0&l0=-1&l1=-1

### Start configuration ?

Review settings before configuring the Thomson Gateway.

The Wizard has enough information to configure your SpeedTouch™. If you want to review or change settings, click Back. Click Start to start configuration.

Settings:

```
Device:
  Name      TG585 v7
  Serial #  0805TF0LQ

Device Configuration:
  Region    World
  Provider  Basic
  Service   Routed PPP
  Description Routed Connection.
```


< Back Start > Cancel

Internet | Protected Mode: On 100%

Click on Start




# Basic Setup for TG585 v7

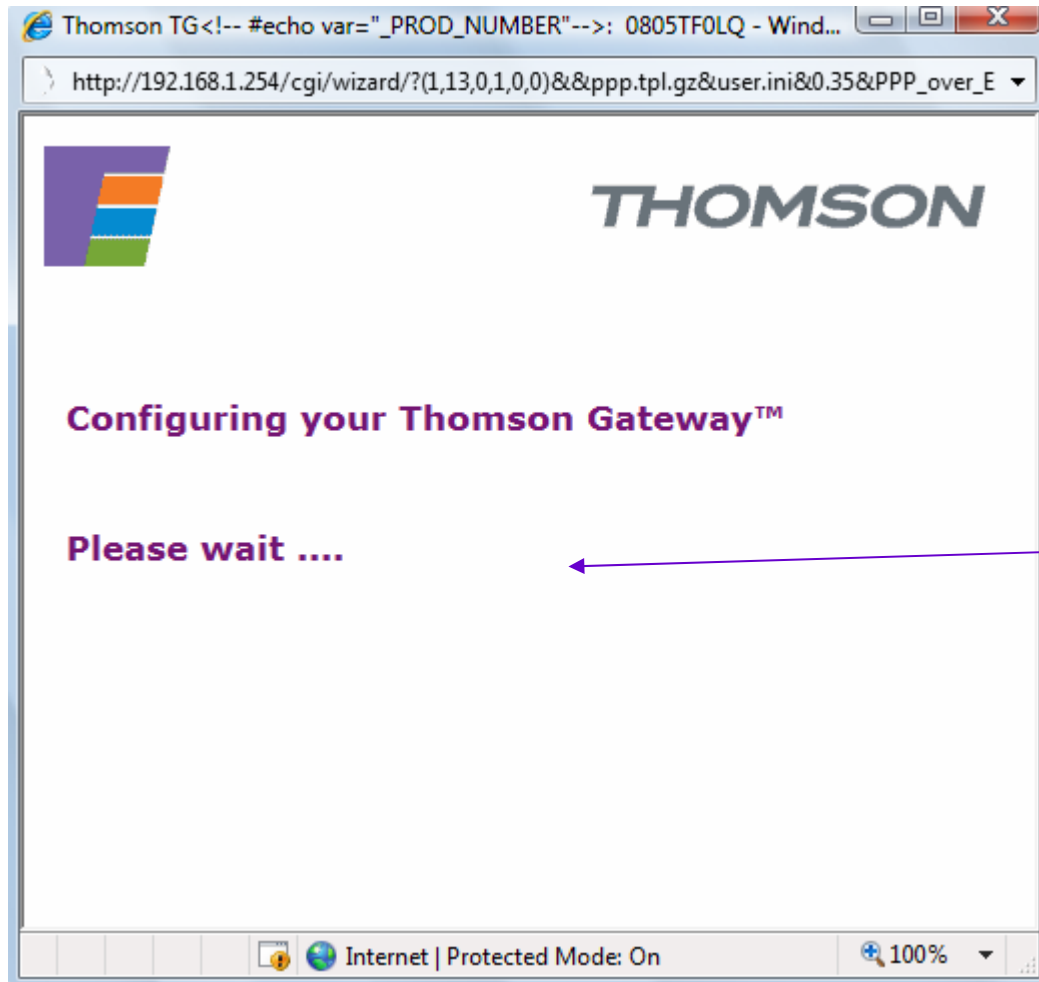

Please wait until this screen disappear

# Basic Setup for TG585 v7

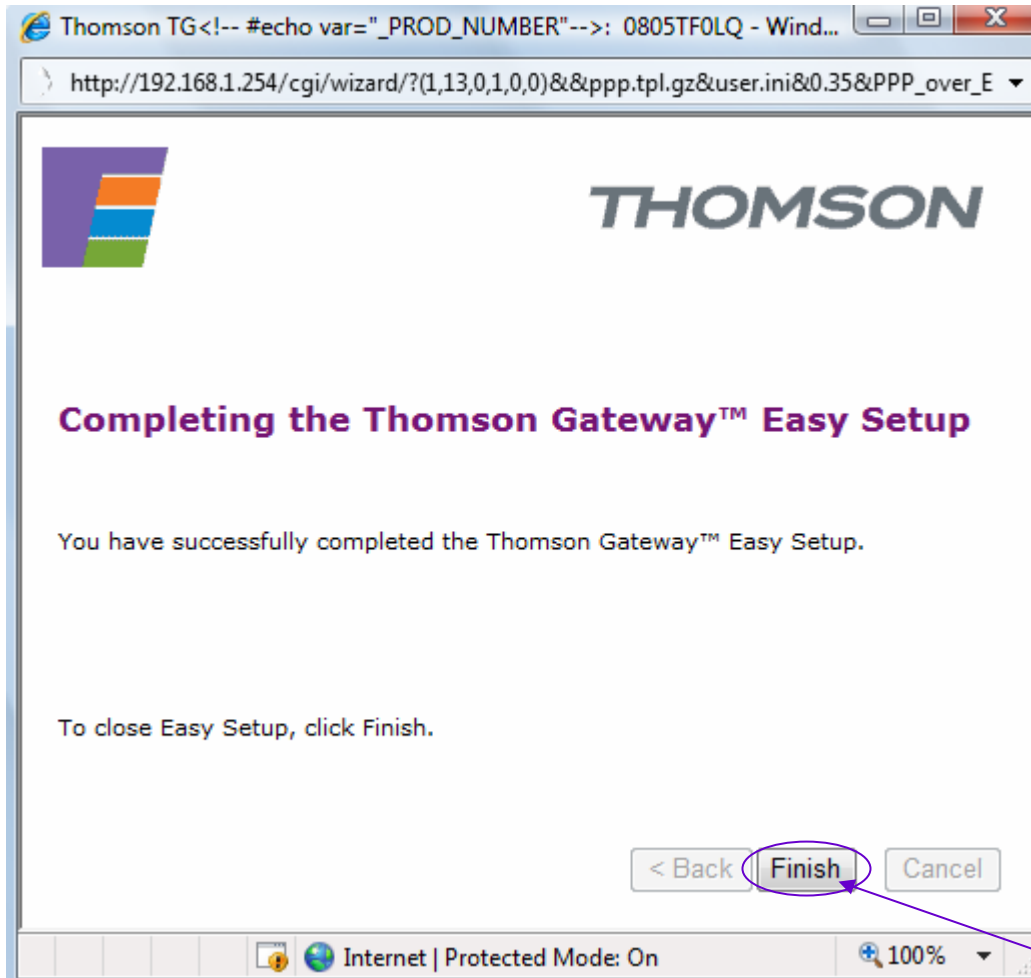

Click on Finish

# Wireless Setup for TG585 v7

THOMSON TG585 v7



THOMSON

## Thomson Gateway

- Information
- Configuration
- Event Logs

## Broadband Connection

## Toolbox

## Home Network

[ [Administrator](#) ]

[Help](#)

[Home](#) > [Thomson Gateway](#)



**Your DSL connection is down. Verify that your Thomson Gateway is correctly connected to your phone line. If the problem persists, check your documentation.**



## Thomson Gateway






### Information

Product Name: TG585 v7  
Serial Number: CP0805TF0LQ  
Software Release: 7.4.2.7

### Configuration

Service Name: Routed PPP (modified by user)  
Time Since Power-on: 0 days, 1:53:59

### Pick a task...

-  [Set Up](#)
-  [Restart](#)
-  [Return to Factory Default Settings](#)
-  [View event logs](#)
-  [Check connectivity to the Internet](#)

Click on Home Network

# Wireless Setup for TG585 v7

THOMSON TG585 v7



THOMSON

Thomson Gateway

Broadband Connection

Toolbox

Home Network

- Devices
- Interfaces


[ Administrator ]

[Help](#)

[Home](#) > [Home Network](#)



Your DSL connection is down. Verify that your Thomson Gateway is correctly connected to your phone line. If the problem persists, check your documentation.



## Home Network



Wireless

WLAN: Thomson411EE1  
(54Mbps)



Ethernet

ethport1  
(100Mbps)  
ethport2  
(100Mbps)  
ethport3  
(100Mbps)  
ethport4  
(100Mbps)



Unknown-00-19-d1-40-bf-77

Click on WLAN: Thomson411EE1

# Wireless Setup for TG585 v7

THOMSON TG585 v7



THOMSON

Thomson Gateway

Broadband Connection

Toolbox

Home Network

▪ Devices


▪ Interfaces

[ Administrator ]

Overview | Details | **Configure** | Help

Home > Home Network > Interfaces > WLAN: Thomson411EE1

 Your DSL connection is down. Verify that your Thomson Gateway is correctly connected to your phone line. If the problem persists, check your documentation.



## Wireless Access Point - Thomson411EE1

- **Configuration**

Interface Enabled:	Yes
Physical Address:	00:1D:68:69:1C:F9
Network Name (SSID):	Thomson411EE1
Interface Type:	802.11b/g
Actual Speed:	54 Mbps
Band:	2.4G Hz

- **Security**

Allow New Devices:	New stations are allowed (automatically)
Security Mode:	none

Click on Configure

# Wireless Setup for TG585 v7

THOMSON TG585 v7



THOMSON

Thomson Gateway

Broadband Connection

Toolbox

Home Network


▪ Devices

▪ Interfaces

[ Administrator ] [Overview](#) | [Details](#) | [Configure](#) | [Help](#)

[Home](#) > [Home Network](#) > [Interfaces](#) > [WLAN: Thomson411EE1](#)

**Your DSL connection is down. Verify that your Thomson Gateway is correctly connected to your phone line. If the problem persists, check your documentation.**



## Wireless Access Point - Thomson411EE1

### • Configuration

Interface Enabled:   
Physical Address: 00:1D:68:69:1C:F9  
Network Name (SSID): Thomson411EE1  
Interface Type: 802.11b/g  
Actual Speed: 54 Mbps  
Band: 2.4G Hz  
Channel Selection: Automatic  
Region: Europe  
Channel: 1  
Allow multicast from Broadband Network:

### • Security

Broadcast Network Name:   
Allow New Devices: New stations are allowed (automatically)  
Encryption:  Disabled  
 Use WEP Encryption  
 Use WPA-PSK Encryption  
WEP Key Length: 64 bit  
WEP Encryption Key: FBE23EF074

Apply Cancel

Type The name for the network (e.g. Name of customer)

Type the password (e.g. must contain letters from A to F and numbers from 0 to 9, and up to 10 digits)

Click on Use WEP Encryption

Click on Apply

Pick a task...

[Configure WDS](#)